


SCM

CHANGEOVER

MODEL **SCMLCD1+1**

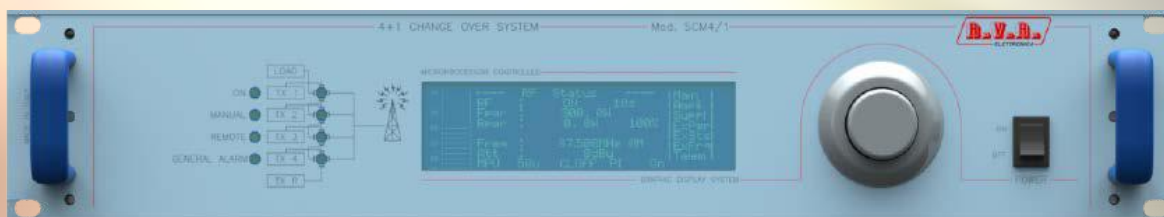

ORDERING INFORMATION	
Model	Description
SCMLCD1+1	Telemetry automatic changeover unit.

OPTION	
SCMLCD1+1/T0	Automatic changeover "1+1" unit and telemetry unit with Nr 1 I/O base card on board.
SCMLCD1+1/T1	Automatic changeover "1+1" unit and telemetry unit with Nr 1 I/O additional card on board.
SCMLCD1+1/T2	Automatic changeover "1+1" unit and telemetry unit with Nr 2 I/O additional cards on board.
SCMLCD1+1/T3	Automatic changeover "1+1" unit and telemetry unit with Nr 3 I/O additional cards on board.



SCMLCD1+1

Changeover Units System.

FEATURES

- Up to 1+1 Changeover compatible with all RVR transmitters.
- "1+1" automatic changeover takes place across many transmitters and a spare one.
- Integrates on-board telemetry unit to guarantee utmost transmitter site's control.
- User-friendly graphic display ensures prompt reading and easy setup of all operating parameters.
- Features 24V connector that could be used as backup power in case of main power failure.
- Lightweight and rugged stainless steel 2 HE rack case.

SCMLCD1+1

Parameters		Value	Notes	
GENERALS				
Integrated coax-relè	Only / V2	Yes		
Ambient working temperature		-10 °C to + 50 °C / 95%	Relative humidity non condensing	
POWER REQUIREMENTS				
AC Power input	AC Supply voltage	115 - 125 - 230 - 250 VAC ±15%		
	AC Apparent power consumption	W		
	Connector	VDE IEC Standard		
DC Power input	DC Supply voltage	24 VDC		
	DC Current	A		
MECHANICAL DIMENSIONS				
Physical dimensions	L x H x W	mm / inch	483 / 19	EIA rack
		mm / inch	88 / 3 1/2	2HE
Weight		kg	About 4	
Cooling			Convection cooling	
Acoustic noise		dBa	0	
AUDIO INPUTS				
Analog		8 ÷ 32	Analog inputs depending by expansion card number.	
Digital / Analog		16 ÷ 64	Digital inputs depending by expansion card number.	
OUTPUTS				
Relay		8 ÷ 32	Analog inputs depending by expansion card number.	
FUSES				
On mains		1 External fuse 4 A F - 5X20 mm		
On services		X		
On PA Supply		X		
On driver supply		X		

All pictures are RVR's property and they are only indicative and not binding. The pictures can be modified without notice. These are general specifications. They show typical values and are subject to change without notice.



R.V.R. Elettronica S.r.l.
Via del Fonditore 2/2 c
40138 Bologna - Italy
Phone +39 051 6010506
info@rvr.it

www.rvr.it